



# T1250 Series TCXO

## 10 MHz to 50 MHz

(Rev A)

GREENRAY INDUSTRIES, INC.

### PRECISION QUARTZ TECHNOLOGY

Dual Compensated

### SPECIFICATIONS


<b>Frequency</b>	10.0 MHz to 50.0 MHz		
<b>Output</b>	"C" option - CMOS Squarewave; "S" option - Clipped Sinewave		
<b>Load</b>	CMOS - 15pF; Clipped Sinewave – 10pf / 10kohms		
<b>Symmetry</b>	50% ± 10% (CMOS version)		
<b>Temp Stability</b>	<b>Temp Range</b>	<b>Tolerance</b>	<b>Option</b>
	-40 to +85°C	±3x10 <sup>-8</sup>	T38
	-40 to +85°C	±5x10 <sup>-8</sup>	T58
	-40 to +85°C	±1x10 <sup>-7</sup>	T17
	(fmax-fmin)/2xfmin; EFC at center of range. Trim effect ≤ ±0.1ppM over 0 to Vs		
	EFC and temp. Hysteresis not included in stability spec.		
<b>Freq vs. Supply</b>	±1x10 <sup>-7</sup> for a 5% change		
<b>Aging</b>	±5x10 <sup>-7</sup> per year; <3ppM for 15 years		
<b>Supply V</b>	+5.0 or +3.3 VDC ± 5%		
<b>Input Current</b>	25mA max		
<b>Phase Noise</b>	<b>Offset</b>	<b>dBc/Hz</b>	
(10MHz typ)	10 Hz	-90	
	100 Hz	-120	
	1 kHz	-140	
	10 kHz	-150	
	100 kHz	-155	
<b>Accel Sensitivity</b>	≤2.5x10 <sup>-9</sup> /g (SD option); or ≤7x10 <sup>-10</sup> /g (LG option)		
<b>Frequency Adjust</b>	±7ppM typ; via 0 to Vsupply EFC; positive slope		
<b>Environmental</b>	Storage Temp: -55 to +95°C		
	Random Vibration: MIL-STD-202, Meth 214, Cond I-J		
	Sine Vibration: MIL-STD-202, Meth 204, Cond D		
	Shock: MIL-STD-202, Meth 213, Cond F		

Ordering Example:

T1250-T58-C-3.3-LG-10MHz  
(Model-Stability-Output-InpV-GSense-Freq)

### Pad Connections

- 1 - EFC
- 2 - N/C
- 3 - 0 V & Case Gnd
- 4 - Output
- 5 - N/C
- 6 - VSupply

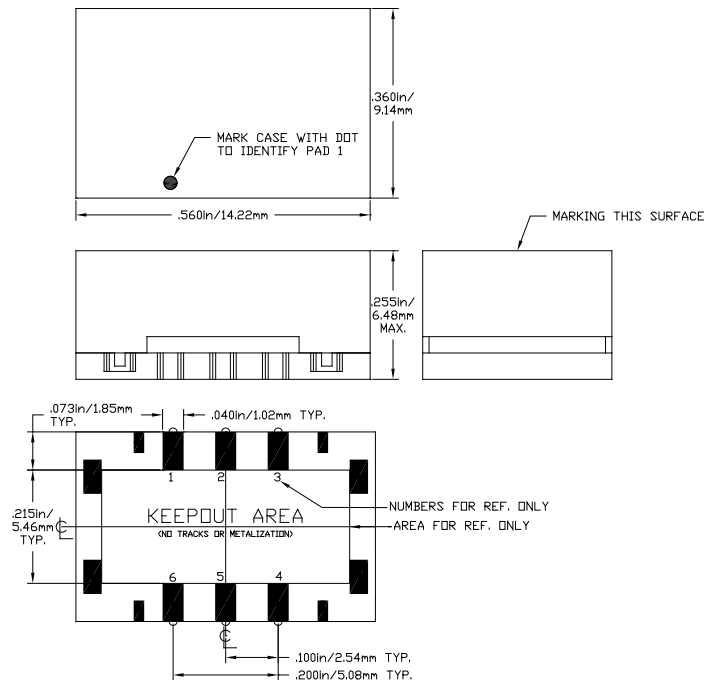

To inquire about available custom parameters, please contact us at [sales@greenrayindustries.com](mailto:sales@greenrayindustries.com)

840 West Church Rd., Mechanicsburg, PA 17055

Tel: (717) 766-0223 Fax: (717) 790-9509

[www.greenrayindustries.com](http://www.greenrayindustries.com) email: [sales@greenrayindustries.com](mailto:sales@greenrayindustries.com)