



frequency control solutions

texo

T121

**TIGHT STABILITY
LOW ACCELERATION SENSITIVITY
RUGGED PACKAGE**

Product Description

Greenray Industries' T121 TCXO is a super stable frequency reference for high shock and high vibration environments.



Features

- Available from 50MHz to 100MHz
- Rugged 17.3mm sq. package
- +5 VDC Supply
- Sinewave output
- Temperature Stability to ± 0.5 ppm (-40 to +85°C)
- Low Power consumption
- Vibration sensitivity of 0.7 ppb/g or better
- Ideal for Wireless and Mobile applications

Applications

- Telecommunications
- Mobile radio
- Mobile instrumentation
- Airborne communications
- Wireless communications
- Microwave receiver

Rev. E



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2008 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T121 SERIES
50 MHz to 100 MHz



Electrical Characteristics

Frequency Characteristics						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Nominal Frequency		50		100	MHz	
Frequency Stability (other stability available, please contact factory)	-40°C to +85°C		± 0.5		ppm	T57
	-40°C to +85°C		± 1		ppm	T16
	-55°C to +95°C		± 3		ppm	V36
Total Stability	From nominal over 10 years (including temp stability, load, aging, supply V)			± 5	ppm	
Aging	1 st year			± 1	ppm	
Acceleration Sensitivity	(note 1)			0.7	ppb/g	
Frequency vs Voltage	For a 5% change			± 0.1	ppm	
Frequency vs Load	For a 5% change			± 0.1	ppm	
Electronic Frequency Control	EFC = 0 to Supply Positive slope,		± 7		ppm	
Phase Noise Performance						
Parameter	Frequency Offset (Hz)	Min	Typical	Max	Units	Ordering Code
Static @ 100 MHz nominal Frequency	10		-75		dBc/Hz	
	100		-102		dBc/Hz	
	1k		-125		dBc/Hz	
	10 k		-140		dBc/Hz	
	100 k		-145		dBc/Hz	
DC Supply						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Supply Voltage		4.75	5.0	5.25	VDC	
Supply Current				25	mA	
RF Output						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Sine						
Harmonic & Subs				- 40	dBc	
Load			50		Ω	
Level	50Ω load	+ 1	+ 3	+ 5	dBm	

(1) Acceleration Sensitivity is worst axis tested at 90 Hz, 10 g



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
 TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
 www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2008 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T121 SERIES
50 MHz to 100 MHz



Environmental and Mechanical Specifications

Screenings			
Screening	Standard	Method, Condition	Description
Vibration	MIL-STD-202F	214, II.H	0.6 PSD, 34.02 g RMS, 3min/axis
Shock	MIL-STD-202F	213	90 g peak, half-sine, 5 ms

Recommendation and General Information

Conditions	
Parameter	Notes
Operating Temperature	-55°C to +95°C
Storage Temperature	-55°C to +105°C
Terminal Finish	Gold plated is standard. SnPb 63/37 (non-RoHS) and SnAg (RoHS) are available
Package Weight	< 3 grams
Soldering Instruction	Hand or reflow soldering
Shipping	Tray pack
Marking	Line 1: Greenray logo + Model Line 2: Frequency Line 3: Serial Number Line 4: Data Code (YYWW)

Ordering Example

T121	-	V36	-	100.0MHz	-	E
Model		Stability		Frequency in MHz		Termination finish
		<u>Refer to Electrical Specs Table*</u> T57 (-40 to +85°C) T16 (-40 to +85°C) V36 (-55 to +95°C)		From 50 to 100 MHz		<u>Code: Pads finish</u> E: Gold plated (RoHS), standard PB: SnPb 63/37 (non-RoHS) LF: SnAg 96.5/3.5 (Lead-free)

*other frequency stabilities available, please contact factory



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2008 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.




frequency control solutions

T121 SERIES
50 MHz to 100 MHz



Package dimensions and Pad Connections

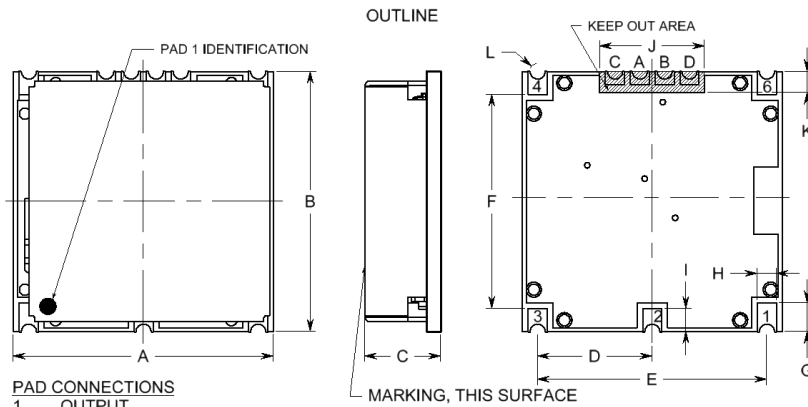


PAD CONNECTIONS

- 1. OUTPUT
- 2. NC
- 3. SUPPLY
- 4. NC
- 6. 0V & CASE GND
- A. DIO (INTERNAL USE ONLY)
- B. CS (INTERNAL USE ONLY)
- C. SCLK (INTERNAL USE ONLY)
- D. ENABLE (INTERNAL USE ONLY)

PART DIMENSIONS

DIM	TYP.		MAX.	
	inches	mm	inches	mm
A	0.680	17.27	0.690	17.53
B	0.680	17.27	0.690	17.53
C	0.200	5.08	0.210	5.33
D	0.300	7.62	0.310	7.87
E	0.600	15.24	0.610	15.49
F	0.560	14.22	0.570	14.48
G	0.075	1.91	0.085	2.16
H	0.050	1.27	0.060	1.52
I	0.060	1.52	0.070	1.78
J	0.275	6.99	0.285	7.24
K	0.060	1.52	0.070	1.78
L	R0.020		R0.51	NA

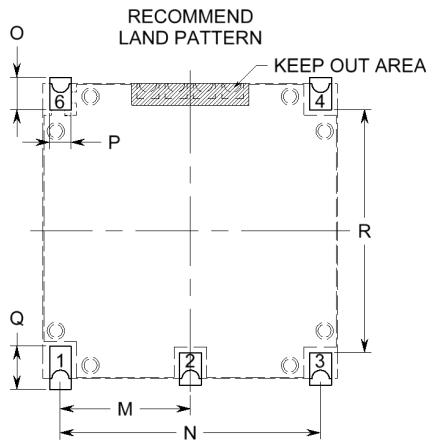

LAND PATTERN DIMENSIONS

DIM	TYP.		MAX.	
	inches	mm	inches	mm
M	0.300	7.62	NA	NA
N	0.600	15.24	NA	NA
O	0.075	1.91	NA	NA
P	0.050	1.27	NA	NA
Q	0.100	2.54	NA	NA
R	0.560	14.22	NA	NA



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
 TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
 www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2008 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.