



frequency control solutions

texo

T1215

HERMETIC TCXO
TIGHT TEMPERATURE STABILITY


Product Description

Greenray Industries' T1215 TCXO offers outstanding, reliable performance under high shock & vibration conditions



Features

- 9.1 x 7.5 mm, ruggedized, hermetic package
- 3.3 or 5 VDC Supply
- Wide Frequency Range from 750 kHz to 800 MHz
- CMOS, Clipped Sine, LVPECL or LVDS output
- MIL Screening to MIL-PRF-55310 available
- High reliability and long-term stability performance
- Reduced Acceleration Sensitivity to 0.7 ppb/g



Applications

- Telecommunications
- RF telemetry systems
- Multiband terminal
- Upconverter
- GNSS
- Satellite communications
- Instrumentation

Rev. H



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2005 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T1215 SERIES
750 KHz to 800 MHz



Electrical Characteristics

Frequency Characteristics						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Nominal Frequency	C or CS	10		50	MHz	
	C	0.75		150	MHz	
	PE or DS	20		800	MHz	
Frequency Stability (Other stability available)	-40°C to +85°C		± 0.5		ppm	T57
	-40°C to +85°C		± 1.0		ppm	T16
	-55°C to +85°C		± 2.0		ppm	U26
	-55°C to +95°C		± 3.0		ppm	V36
Aging	1 st year		± 0.5	± 1	ppm	
	10 years		± 4	± 6	ppm	
	20 years			± 10	ppm	
Acceleration Sensitivity	(Note 1)			2.5	ppb/g	SD
				0.7	ppb/g	LG
Frequency vs Voltage	± 2%			0.3	ppm	
Electronic Frequency Control	EFC = 0 to SUP. Positive slope		± 7		ppm	
DC Supply						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Supply Voltage (Note 2)	± 5%	3.0	3.3	3.6	VDC	3.3
	± 5%	4.75	5.0	5.25	VDC	5.0
Supply Current	CMOS, Clipped Sine (10 to 50 MHz)			6	mA	C, CS
	CMOS (750 KHz to 150 MHz)			45	mA	C
	LVDS			65	mA	DS
	LVPECL			80	mA	PE
RF Output						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
CMOS	3.3V, 750 kHz to 150 MHz					C
	5.0V, 10 MHz to 50 MHz					C
Load			15		pF	
Logic Levels	15 pF load	SUP.-0.3 "1" level		0.3 "0" level	V	
Rise/Fall Time			2.4	4	nSec	
Symmetry		45	50	55	%	
Clipped Sine						CS
Output Voltage	Into 10 kΩ // 10 pF	0.3	1.0		Vp-p	
LVDS						DS
Differential Output Voltage	Load 100Ω, 5 pF, (See fig. 1)	250	350	450	mV	
Offset Voltage	LVDS Compatible	1.125	1.250	1.375	V	
Rise / Fall Time			0.8	1.5	nSec	
Symmetry		45	50	55	%	
LVPECL						PE
Output Voltage	Load 50Ω to SUP. (or equiv.)	SUP.-1.025 "1" level		SUP.-1.620 "0" level	V	
Rise / Fall Time			0.7	1.0	nSec	
Symmetry		45	50	55	%	

- (1) Acceleration Sensitivity is worst axis tested at 90 Hz, 10 g
 (2) +5.0V supply is only available for CS and CL outputs from 10 MHz to 50 MHz



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2005 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T1215 SERIES
750 KHz to 800 MHz



Environmental and Mechanical Specifications

Screenings			
Screening	Standard	Method, Condition	Description
Vibration random	MIL-STD-202	214, Cond II-A	0.2 PSD, 6.21 g RMS
Shock	MIL-STD-202	213, Cond C	100 g, 11 ms duration, half-sine
Fine Leak	MIL-STD-202	112, Cond C	

Recommendations and General Information

Conditions	
Parameter	Notes
Operating Temperature	-55°C to +95°C
Storage Temperature	-55°C to +125°C
Terminal Finish	Gold plated (E) is standard. SnPb 63/37 (PB) and SnAg (LF) also available
Package	Ceramic + metal lid
Package Weight	0.5 grams
Soldering Instruction	Reflow
Shipping	T&R or tray pack
Marking	Line 1: Greenray logo Line 2: Model Line 3: Frequency Line 4: Serial Number + Date Code (YYWW)

Ordering (Example)

T1215	-	T57	-	PE	-	5.0	-	LG	-	B	-	300MHz	-	E
Model		Stability Code		Output Code		Supply Voltage		G-Sensitivity Code		Screening Code		Frequency in kHz or MHz		Termination finish
		<u>Refer to Electrical Specs Table*</u> T57 (-40 to +85°C) T16 (-40 to +85°C) U26 (-55 to +85°C) V36 (-55 to +95°C)		C: CMOS CS: Clipped Sine PE: LVPECL DS: LVDS		3.3: 3.3V 5.0: 5.0V (see note 2)		SD: < 2.5 ppb/g LG: < 0.7 ppb/g HG: Customer-specific		X: No Screening B: MIL-PRF-55310, Class 3 Level B		-750 KHz to 800 MHz		E: Gold plated (RoHS), Standard PB: SnPb 63/37 (non-RoHS) LF: SnAg 6.5/3.5 (Lead-free)


*Other frequency stabilities available, for further information please contact factory



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2005 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.

Package Dimensions and Pad Connections

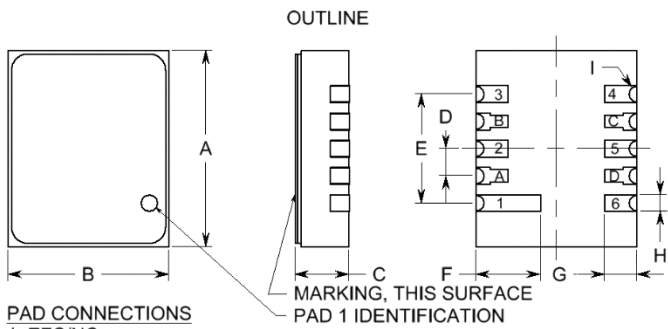


PART DIMENSIONS


DIM	TYP.		MAX.	
	inches	mm	inches	mm
A	0.360	9.14	0.370	9.40
B	0.295	7.49	0.305	7.75
C	NA	NA	0.115	2.92
D	0.050	1.27	0.060	1.52
E	0.200	5.08	0.210	5.33
F	0.118	3.00	NA	NA
G	0.059	1.50	NA	NA
H	0.031	0.79	NA	NA
I	R0.015	R0.38	NA	NA

PAD CONNECTIONS

1. EFC/NC
2. VREF/NC
3. 0V & CASE GND
4. OUTPUT
5. SCLK/NC (INTERNAL USE ONLY)
6. SUPPLY
- A. CS (INTERNAL USE ONLY)
- B. TRI-STATE/NC (INTERNAL USE ONLY)
- C. COMP. OUTPUT/NC (INTERNAL USE ONLY)
- D. DIO (INTERNAL USE ONLY)

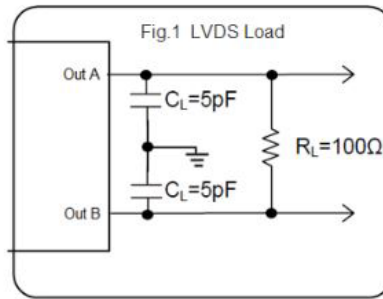

RECOMMENDED LAND PATTERN

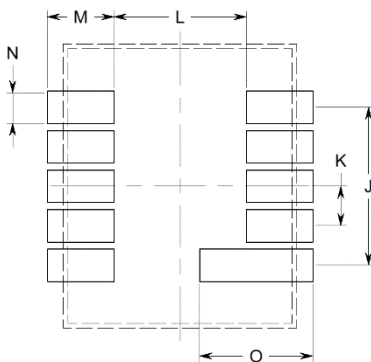

LAND PATTERN DIMENSIONS

DIM	TYP.		MAX.	
	inches	mm	inches	mm
J	0.200	5.08	NA	NA
K	0.050	1.27	NA	NA
L	0.167	4.24	NA	NA
M	0.084	2.13	NA	NA
N	0.041	1.04	NA	NA
O	0.143	3.63	NA	NA