



frequency control solutions

texo

T1354

RADIATION TOLERANT
ULTRA-LOW ACCELERATION SENSITIVITY

Product Description

Greenray Industries' T1354 TCXO offers excellent performance in high shock and vibration environments in a rugged, radiation tolerant package.

Features

- 100 krad (Si) total ionizing dose
- Rugged, hermetic 20.3 x 12.7mm package
- Frequency: 20 to 100 MHz
- Stability: ± 3.0 ppm (-20°C to +70°C)
- Ultra-low acceleration sensitivity < 0.07 ppb/g
- 3.3 Vdc and 5 Vdc supply
- Clipped sine output



Applications

- High orbit transponders
- Low orbit satellites (nano/micro satellites)
- RF telemetry systems
- Multiband terminal
- Upconverter

Rev. E



intertek

Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2022 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T1354 SERIES
20 MHz to 100 MHz



Electrical Characteristics

Electrical Characteristics						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Nominal Frequency	+25°C	10		100	MHz	
Frequency Stability	-20°C to +70°C		± 3		ppm	N36
	-40°C to +85°C		± 5		ppm	T56
	-55°C to +125°C		± 7		ppm	X76
Aging	1 st year		± 1		ppm	
Acceleration Sensitivity	(Note 1)			0.7	ppb/g	SD
				0.07	ppb/g	LG
Frequency vs Voltage	For a 2% change		± 0.3		ppm	
Electronic Frequency Control	EFC = 0 to V _{DD} Negative slope		± 7		ppm	
Short Term	For a 1 sec tau		1		ppb	
Phase Noise Performance						
Parameter	Frequency Offset (Hz)	Min	Typical	Max	Units	Ordering Code
Phase Noise (static) @ 10 MHz Nominal Frequency	10		-90		dBc/Hz	
	100		-120		dBc/Hz	
	1k		-145		dBc/Hz	
	10 k		-150		dBc/Hz	
	100 k		-155		dBc/Hz	
DC Supply						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Supply Voltage	± 5%	3.0	3.3	3.6	VDC	3.3
	± 5%	4.75	5.0	5.25	VDC	5.0
Supply Current				35	mA	
RF Output						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Clipped Sine						S
Load			10 pF // 10k Ω			
Level		+1.5			V _{pp}	

(1) Acceleration Sensitivity is worst axis tested at 90 Hz, 10 g



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2022 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T1354 SERIES
20 MHz to 100 MHz



Environmental and Mechanical Specifications

Screenings			
Screening	Standard	Method, Condition	Description
Vibration	MIL-STD-883	2007, Cond A	50 g, 20 to 2,000 Hz, swept sine
Shock	MIL-STD-883	2002, Cond B	1,500 g, 0.5 ms half-sine

Recommendations and General Information

Conditions	
Parameter	Notes
Operating Temperature	-55°C to +125°C
Storage Temperature	-65°C to +125°C
Radiation	Unit shall continue to operate during exposure to 100 krad (Si)
Terminal Finish	Lead Free or SnPb
Package Finish	Stainless Steel and Nickel-plated Kovar
Package Weight	3 grams
Soldering Instruction	Hand solder only
Shipping	Tray pack
Marking	Line 1: Greenray logo Line 2: Model Line 3: Frequency Line 4: Serial Number + Date Code (YYWW)

Ordering Example

T1354	-	T56	-	3.3	-	LG	-	10.0 MHz	-	E
Model		Stability Code		Supply Voltage		G-Sensitivity Code		Frequency in MHz		Termination finish
		Refer to Electrical Specs Table* N16 (-20°C to +70°C) T56 (-40°C to +85°C) X76 (-55°C to +125°C)		3.3: 3.3V 5.0: 5.0V		SD: < 0.7 ppb/g LG: < 0.07 ppb/g HG: Customer-specific		From 10 to 100 MHz		E: Gold plated (RoHS), Standard PB: SnPb 63/37 (non-RoHS) LF: SnAg 96.5/3.5 (Lead-free)

*Other frequency stabilities available, please contact factory.



intertek

Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2022 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.




frequency control solutions

T1354 SERIES
20 MHz to 100 MHz



Package Information

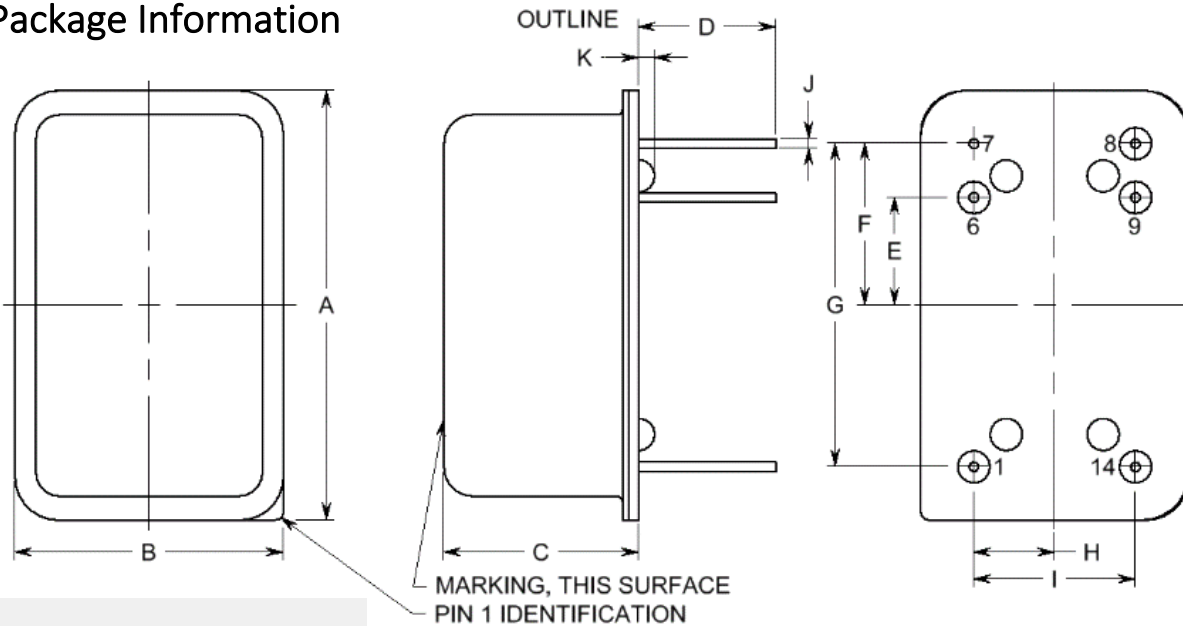

Pin Connections

- 1. CONTROL VOLTAGE
- 6. NC
- 7. GROUND
- 8. OUTPUT
- 9. NC
- 14. SUPPLY VOLTAGE

(NC Pins may have internal Connections and should be Isolated)

PART DIMENSIONS

DIM	TYP.		MAX.	
	inches	mm	inches	mm
A	0.80	20.32	0.82	20.83
B	0.50	12.70	0.52	13.21
C	NA	NA	0.400	10.16
D	NA	NA	0.27	6.86
E	0.200	5.08	0.210	5.33
F	0.300	7.62	0.310	7.87
G	0.600	15.24	0.610	15.49
H	0.150	3.81	0.160	4.06
I	0.300	7.62	0.310	7.87
J	∅0.018	∅0.46	∅0.021	∅0.53
K	NA	NA	0.030	0.76

Preliminary Specification

The specifications on this datasheet pertain to a product which is under engineering development. Contact the factory to determine the current availability.



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2022 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.