



frequency control solutions

texo

## T70

TIGHT TEMPERATURE STABILITY  
RUGGED PACKAGE

### Product Description

Greenray Industries' T70 Series TCXOs offer reliable, precision performance for mobile, battery-powered apps. It has been developed as a reference oscillator for critical timing applications that require tight temperature stability, low supply current, a very rugged package, and a small footprint. The T70 Series is well-suited to use in exploration and tracking equipment applications.



### Features

- Small and rugged 7.0 x 5.0 mm package
- Withstand vibration, and high shock up to 50,000 g
- Tight temperature stability as low as  $\pm 0.1$ ppm
- Excellent long-term aging < 5ppm over 10 years
- Low acceleration sensitivity: < 0.7 ppb/g
- Low power consumption, enable reliable, battery-operated performance gains
- Low phase noise

### Applications

- Telecommunications
- High-shock electronics
- Mobile radio
- Mobile instrumentation
- Airborne communications
- Wireless communications
- Microwave receivers
- Smart munitions

Rev. F



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055  
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com  
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2011 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

**T70 SERIES**  
10 MHz to 50 MHz



## Electrical Characteristics

| Frequency Characteristics                               |                                              |                   |                |                   |       |               |
|---------------------------------------------------------|----------------------------------------------|-------------------|----------------|-------------------|-------|---------------|
| Parameter                                               | Conditions                                   | Min               | Typical        | Max               | Units | Ordering Code |
| Nominal Frequency                                       | +25°C                                        | 10                |                | 50                | MHz   |               |
| Frequency Stability<br>(other stabilities<br>available) | -10°C to +60°C                               |                   | ± 0.1          |                   | ppm   | G17           |
|                                                         | -20°C to +70°C                               |                   | ± 0.1          |                   | ppm   | N17           |
|                                                         | -40°C to +85°C                               |                   | ± 0.3          |                   | ppm   | T37           |
|                                                         | -55°C to +95°C                               |                   | ± 1.0          |                   | ppm   | V16           |
| Aging                                                   | 1 <sup>st</sup> year, for 10 MHz             |                   | ± 0.5          | ± 1               | ppm   |               |
| Acceleration Sensitivity                                | (Note 1)                                     |                   |                | 2.5               | ppb/g | SD            |
|                                                         |                                              |                   |                | 0.7               | ppb/g | LG            |
| Frequency vs Reflow                                     | After 24hrs recovery                         |                   |                | 1                 | ppm   |               |
| Electronic Frequency Control                            | EFC = 0 to V <sub>DD</sub><br>Positive slope |                   | ± 7            |                   | ppm   |               |
| DC Supply                                               |                                              |                   |                |                   |       |               |
| Parameter                                               | Conditions                                   | Min               | Typical        | Max               | Units | Ordering Code |
| Supply Voltage                                          |                                              | 3.0               | 3.3            | 3.6               | VDC   | T70, T72      |
|                                                         |                                              | 4.75              | 5.0            | 5.25              | VDC   | T71, T73      |
| Input Current                                           | CMOS                                         |                   |                | 6                 | mA    | T70, T71      |
|                                                         | Clipped Sinewave                             |                   |                | 3                 | mA    | T72, T73      |
| RF Output                                               |                                              |                   |                |                   |       |               |
| Parameter                                               | Conditions                                   | Min               | Typical        | Max               | Units | Ordering Code |
| CMOS                                                    |                                              |                   |                |                   |       | T70, T71      |
| Load                                                    |                                              |                   | 15             |                   | pF    |               |
| Level                                                   | V <sub>DD</sub> =3.3V                        | +2.8<br>"1" Level |                | +0.2<br>"0" Level | V     | T70           |
|                                                         | V <sub>DD</sub> =5.0V                        | +4.2<br>"1" Level |                | +0.2<br>"0" Level | V     | T71           |
| Symmetry                                                |                                              | 40                | 50             | 60                | %     |               |
| Clipped Sine                                            |                                              |                   |                |                   |       | T72, T73      |
| Load                                                    |                                              |                   | 10 pF // 10k Ω |                   |       |               |
| Level                                                   |                                              | +0.8              |                |                   | V p-p |               |

(1) Acceleration Sensitivity is worst axis tested at 90 Hz, 10 g



**Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055**  
**TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com**  
**www.greenrayindustries.com**

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2011 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



## Environmental Screenings



| Environmentals |              |                   |                                                         |               |
|----------------|--------------|-------------------|---------------------------------------------------------|---------------|
| Screening      | Conditions   | Method, Condition | Notes                                                   | Ordering Code |
| Vibration      | MIL-STD-202G | 214A, I-F         | 0.3 PSD, 20.71 g RMS                                    |               |
| Shock          | MIL-STD-202G | 213, I            | 100 g, 5 ms, Sawtooth<br>Shock available up to 50,000 g | HG            |

## Ordering (Example)

| T70                    | - | N17                                              | - | LG                    | - | 20.0MHz           | - | E                               |
|------------------------|---|--------------------------------------------------|---|-----------------------|---|-------------------|---|---------------------------------|
| Model                  |   | Stability Code                                   |   | G-Sensitivity Code    |   | Frequency in MHz  |   | Termination finish              |
| Model: Input V Output  |   | Refer to <a href="#">Electrical Specs Table*</a> |   | SD: < 2.5 ppb/g       |   | From 10 to 50 MHz |   | E: Gold plated (RoHS), Standard |
| T70 +3.3V CMOS         |   | G17 (-10°C to +60°C)                             |   | LG: < 0.7 ppb/g       |   |                   |   | PB: SnPb 63/37 (non-RoHS)       |
| T71 +5.0V CMOS         |   | N17 (-20°C to +70°C)                             |   | HG: Customer-specific |   |                   |   | LF: SnAg 96.5/3.5 (Lead-free)   |
| T72 +3.3V Clipped Sine |   | T37 (-40°C to +85°C)                             |   |                       |   |                   |   |                                 |
| T73 +5.0V Clipped Sine |   | V16 (-55°C to +95°C)                             |   |                       |   |                   |   |                                 |

\*other frequency stabilities available, for further information please contact factory

## Recommended Solder Reflow Profiles

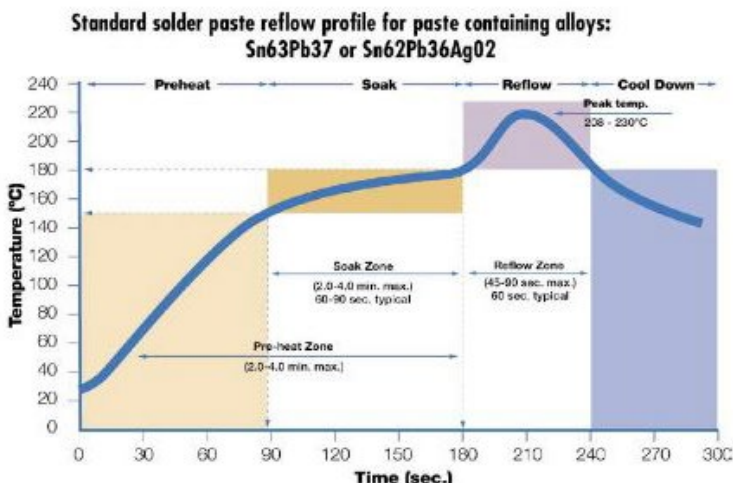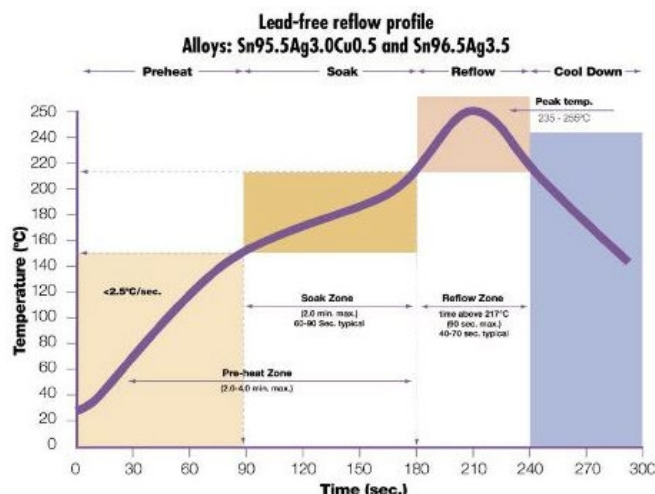

Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055  
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com  
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2011 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.




frequency control solutions

**T70 SERIES**  
10 MHz to 50 MHz



## Package information

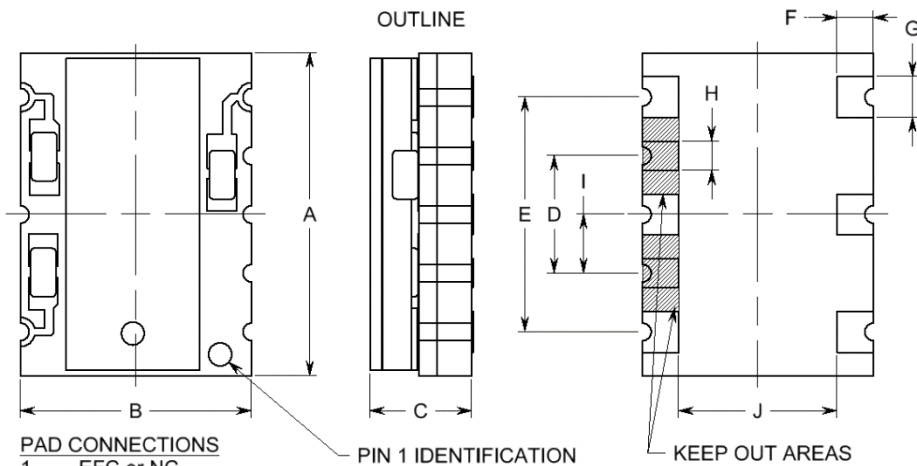

**PAD CONNECTIONS**


1. EFC or NC
2. SCLK (INTERNAL USE ONLY)
3. 0V & CASE GND
4. OUTPUT
5. TRI-STATE/VREF/UTIL (SEE TABLE 1 FOR TRI-STATE FUNCTION)
6. SUPPLY
- A. DIA (INTERNAL USE ONLY)
- B. CS (INTERNAL USE ONLY)

**PART DIMENSIONS**

| DIM | TYP.   |      | MAX.   |      |
|-----|--------|------|--------|------|
|     | inches | mm   | inches | mm   |
| A   | 0.275  | 7.00 | 0.280  | 7.11 |
| B   | 0.197  | 5.00 | 0.202  | 5.13 |
| C   | NA     | NA   | 0.100  | 2.54 |
| D   | 0.100  | 2.54 | 0.105  | 2.67 |
| E   | 0.200  | 5.08 | 0.205  | 5.21 |
| F   | 0.031  | 0.79 | NA     | NA   |
| G   | 0.035  | 0.89 | NA     | NA   |
| H   | 0.025  | 0.64 | NA     | NA   |
| I   | 0.050  | 1.27 | 0.055  | 1.40 |
| J   | 0.135  | 3.43 | 0.140  | 3.56 |

**TABLE 1: TRI-STATE FUNCTION**

| PAD 5         | ENABLE/DISABLE FUNCTION |
|---------------|-------------------------|
| HIGH (SUPPLY) | OUTPUT ENABLED          |
| OPEN (NC)     | OUTPUT ENABLED          |
| LOW (GND)     | HIGH IMPEDANCE DISABLED |

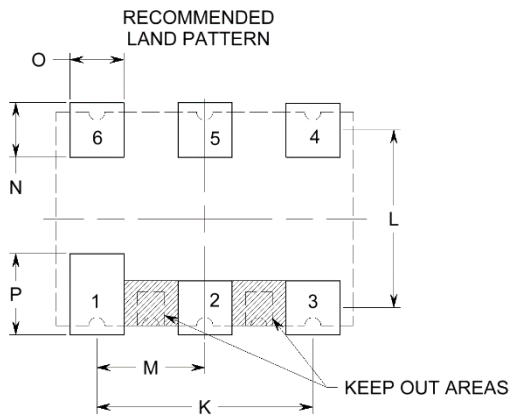

**LAND PATTERN DIMENSIONS**

| DIM | TYP.   |      | MAX.   |      |
|-----|--------|------|--------|------|
|     | inches | mm   | inches | mm   |
| K   | 0.200  | 5.08 | 0.205  | 5.21 |
| L   | 0.164  | 4.17 | 0.169  | 4.29 |
| M   | 0.100  | 2.54 | 0.105  | 2.68 |
| N   | 0.050  | 1.27 | NA     | NA   |
| O   | 0.050  | 1.27 | NA     | NA   |
| P   | 0.075  | 1.91 | NA     | NA   |



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055  
 TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com  
 www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2011 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.