



frequency control solutions


texo

T90

TIGHT TEMPERATURE STABILITY
VERY RUGGED, SMT PACKAGE

Product Description

Greenray Industries' T90 Series TCXOs offer tight stability in a rugged, miniature package.



Features

- 9.1 x 7.5 mm package
- Tight Stability & Low g-Sensitivity
- High Shock & Vibration Options available
- Temperature Stability of ± 0.5 ppm over -40 to $+85^{\circ}\text{C}$
- Vibration per MIL-STD-202F, Method 204, Condition A
- Shock per MIL-STD-202F, Method 213, Condition C

Applications

- Telecommunications
- High-shock electronics
- Mobile radio
- Mobile instrumentation
- Airborne communications
- Wireless communications
- Microwave receivers
- Smart munitions

Rev. N



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2004 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T90 SERIES
10 MHz to 50 MHz



Electrical Characteristics

Frequency Characteristics						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Nominal Frequency	+25°C	10		50	MHz	
Frequency Stability	-20°C to +70°C		± 0.5		ppm	N57
	-40°C to +85°C		± 1		ppm	T16
	-40°C to +85°C		± 0.5		ppm	T57
	-55°C to +95°C		± 2.0		ppm	V26
Aging	1 st year, for 10 MHz		± 0.5	± 1	ppm	
Acceleration Sensitivity	(Note 1)			2.5	ppb/g	
Frequency vs Reflow	After 24hrs recovery			1	ppm	
Electronic Frequency Control	EFC = 0 to SUP. Positive slope		± 5		ppm	
DC Supply						
Parameter	Conditions	Min	Typical	Max	Units	Ordering code
Supply Voltage		3.0	3.3	3.6	VDC	T91
		4.75	5.0	5.25	VDC	T90
Input Current				20	mA	
RF Output: CMOS						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
CMOS						
Load			15		pF	
Level		+2.4 "1" level		+0.2 "0" level	V	T91
		+4.1 "1" level		+0.2 "0" level	V	T90
Symmetry		40	50	60	%	

(1) Acceleration Sensitivity is worst axis tested at 90 Hz, 10 g



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2004 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

T90 SERIES
10 MHz to 50 MHz



Recommendations and General Information

Conditions	
Parameter	Notes
Operating Temperature	-55°C to +95°C
Storage Temperature	-60°C to +105°C
Terminal Finish	Gold (E) is standard. SnPb 63/37 (non-RoHS) or AgCu (RoHS) available
Package Finish	Metal lid
Package Weight	< 3 grams
Soldering Instruction	Hand solder or Solder reflow
Shipping	Tray pack
Marking	Line 1: Model Line 2: Serial Number Line 3: Date Code (YYWW) Line 4: Greenray logo

Environmental Screenings

Environmentals			
Screening	Conditions	Method, Condition	Notes
Vibration	MIL-STD-202G	204, A	0.3 PSD, 20.71 g RMS
Shock	MIL-STD-202G	213, C	100 g, 5ms, Sawtooth

Ordering Example

T90			V26			20.0MHz			E		
Model			Stability			Frequency in MHz			Termination finish		
<u>Model: Input V Output</u>			<u>Refer to Electrical Specs Table*</u>			From 10 to 50 MHz			<u>Code: Pads finish</u>		
T90	+5.0V	CMOS	N57	(-20°C to +70°C)					E:	Gold plated	(RoHS), standard
T91	+3.3V	CMOS	T16	(-40°C to +85°C)					PB:	SnPb 63/37	(non-RoHS)
			T57	(-40°C to +85°C)					LF:	SnAg 96.5/3.5	(Lead-free)
			V26	(-55°C to +95°C)							

*other frequency stabilities available, please contact factory



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2004 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.





frequency control solutions


T90 SERIES
10 MHz to 50 MHz



Recommended Solder Reflow Profiles

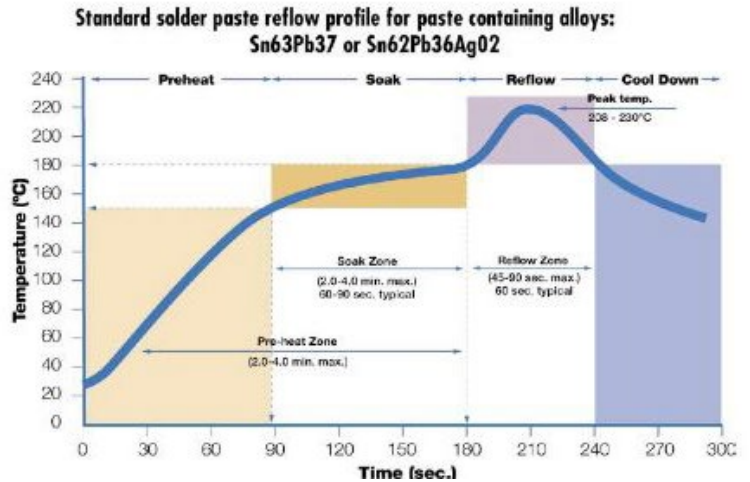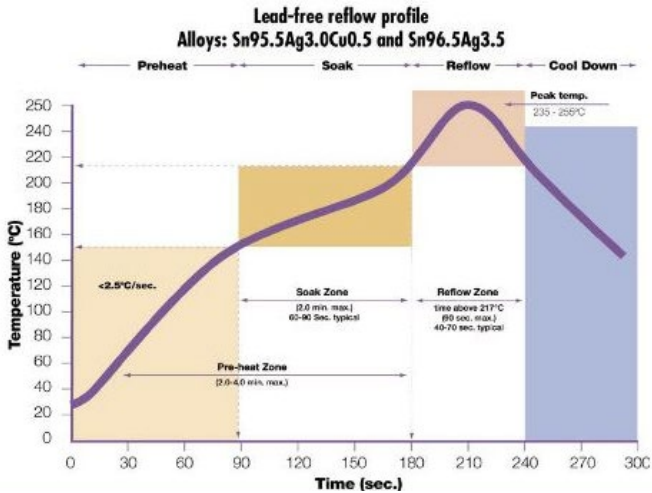


Package information

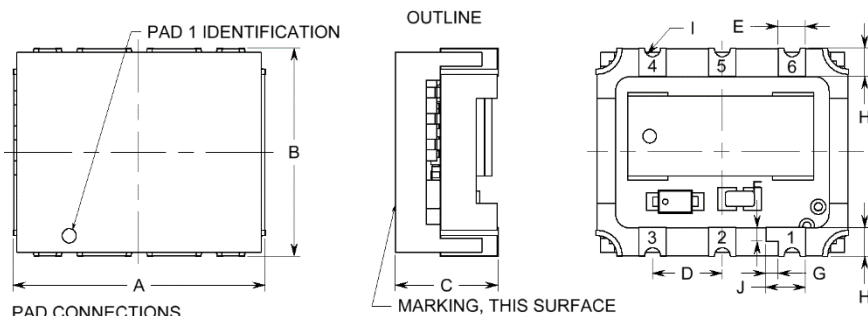

- PAD CONNECTIONS**
1. EFC
 2. VREF
 3. 0V & CASE GND
 4. OUTPUT
 5. NC
 6. SUPPLY

RECOMMENDED LAND PATTERN

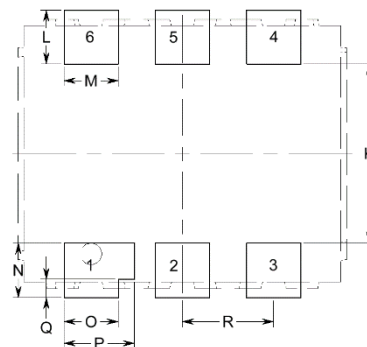

PART DIMENSIONS

DIM	TYP.		MAX.	
	inches	mm	inches	mm
A	0.360	9.14	0.375	9.53
B	0.295	7.49	0.310	7.87
C	NA	NA	0.153	3.90
D	0.100	2.54	0.115	2.92
E	0.040	1.02	NA	NA
F	0.020	0.51	NA	NA
G	0.018	0.46	NA	NA
H	0.040	1.02	NA	NA
I	R0.014	R0.36	NA	NA
J	0.057	1.45	NA	NA

LAND PATTERN DIMENSIONS

DIM	TYP.		MAX.	
	inches	mm	inches	mm
R	0.100	2.54	NA	NA
K	0.196	4.98	NA	NA
L	0.060	1.52	NA	NA
M	0.060	1.52	NA	NA
N	0.060	1.52	NA	NA
O	0.060	1.52	NA	NA
P	0.077	1.96	NA	NA
Q	0.020	0.51	NA	NA



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
 TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
 www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2004 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.