



frequency control solutions

Y1600

GOOD PHASE NOISE PERFORMANCE
RUGGED, COMPACT PACKAGE

XO

Product Description

Greenray Industries' Y1600 XO offers good phase noise performance in a compact, rugged package



Features

- 20.3 x 12.7 mm, rugged DIP package
- 5 VDC Supply
- Frequency Range: 10 MHz to 100 MHz
- CMOS output
- MIL Screening to MIL-PRF-55310 available
- Random Vibration per MIL-STD-202, Method 214
- Shock per MIL-STD-202, Method 213
- RoHS compliant

Applications

- Telecommunications
- High-shock electronics
- Mobile radio
- Mobile instrumentation
- Airborne communications
- Wireless communications
- Microwave receivers

Rev. E



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2005 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



frequency control solutions

Y1600 SERIES
10 MHz to 100 MHz



Electrical Characteristics

Frequency Characteristics						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Nominal Frequency		10		100	MHz	
Frequency Stability (other stability available)	0°C to +50°C		± 5		ppm	B56
	-20°C to +70°C		± 10		ppm	N106
	-40°C to +85°C		± 15		ppm	T156
Aging	1 st year			± 1	ppm	
	10 years (10 MHz)			± 3	ppm	
Acceleration Sensitivity	(note 1)			2.5	ppb/g	
Frequency vs Voltage	For a 5% change			± 0.1	ppm	
Frequency vs Load	For a 10% change			± 0.1	ppm	
Electronic Frequency Control	EFC = 0 to SUP.-0.5 Positive slope		± 10		ppm	
Phase Noise Performance						
Parameter	Frequency Offset (Hz)	Min	Typical	Max	Units	Ordering Code
Static @ 10 MHz nominal Frequency	10		-105		dBc/Hz	
	100		-135		dBc/Hz	
	1k		-155		dBc/Hz	
	10 k		-160		dBc/Hz	
	100 k		-162		dBc/Hz	
DC Supply						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Supply Voltage		4.75	5.0	5.25	Vdc	
Supply Current	10 MHz Freq.			15	mA	
RF Output: CMOS						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
CMOS						
Load		10	15		pF	
Level	15 pF load, 5.0V	+4.5 "1" level		+0.2 "0" level	V	
Symmetry		45	50	55	%	

(1) Acceleration Sensitivity is worst axis tested at 90 Hz, 10 g



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2005 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



Environmental and Mechanical Specifications

Screenings			
Screening	Standard	Method, Condition	Description
Random Vibration	MIL-STD-202	214, Cond I-A	0.2 PSD, 5.35 rms G
Sine Vibration	MIL-STD-202	204, Cond D	20 g, 20 to 2,000 Hz,
Shock	MIL-STD-202	213, Cond C	100 g, 6 ms half-sine

Recommendation and General Information

Conditions	
Parameter	Notes
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +85°C
Terminal Finish	Gold plating (RoHS) is standard (E). SnPb 63/37 also available
Package Weight	3 grams
Soldering Instruction	Hand
Shipping	Tray
Marking	Line 1: Greenray logo + Model Line 2: Frequency Line 3: Serial Number + Data Code (YYWW)

Ordering Example

Y1600	-	N106	-	5.0	-	10.0 MHz	-	E
Model		Stability Code		Supply Voltage		Frequency in MHz		Termination finish
		Refer to Electrical Specs Table*		5.0: 5.0VDC		10 to 100 MHz		E: Gold plated (RoHS), Standard PB: SnPb 63/37 (non-RoHS) LF: SnAg 96.5/3.5 (Lead-free)
		B56 (0 to +50°C) N106 (-20 to +70°C) T156 (-40 to +85°C)						

*Other frequency stabilities available, please contact factory.




frequency control solutions

Y1600 SERIES
10 MHz to 100 MHz



Package dimensions and Pad Connections

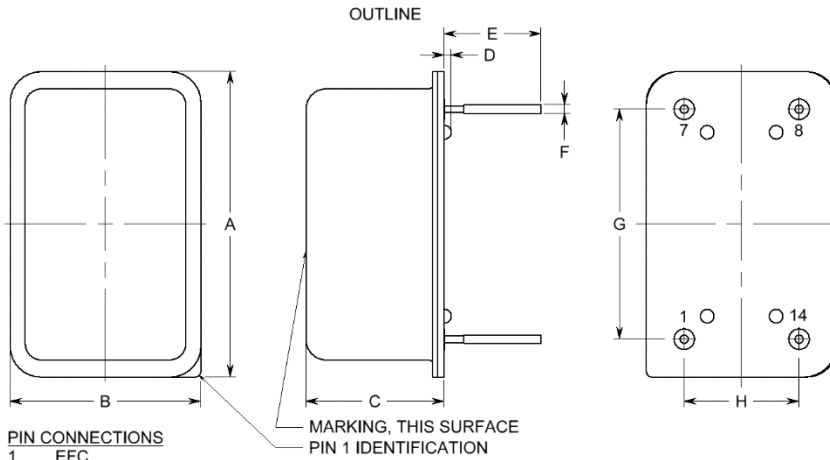

- PIN CONNECTIONS**
- 1. EFC
 - 7. 0V & CASE GND
 - 8. OUTPUT
 - 14. SUPPLY

DIM	TYP.		MAX.	
	inches	mm	inches	mm
A	0.800	20.32	0.820	20.83
B	0.500	12.70	0.520	13.21
C	NA	NA	0.370	9.40
D	0.031	0.79	0.036	0.91
E	0.220	5.59	0.240	6.10
F	ø0.018	ø0.46	ø0.023	ø0.58
G	0.600	15.24	0.605	15.37
H	0.300	7.62	0.305	7.75



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2005 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.