



frequency control solutions

texo

ZT610

LOW PHASE NOISE
VERY RUGGED PACKAGE

Product Description

Greenray Industries' ZT610 TCXO offers excellent phase noise performance in a rugged package. The ZT610 provides reliable performance in high shock and vibration environments.



Features

- Rugged 20.3 x 12.7 mm package
- Stability to 1.0 ppm (-40 to +85°C)
- Aging <1.0 ppm/year
- 5 VDC supply
- CMOS output
- Tight Stability & Aging
- Low phase noise

Applications

- Telecommunications
- High-shock electronics
- Mobile radio
- Mobile instrumentation
- Airborne communications
- Wireless communications
- Microwave receivers
- Smart munitions

Rev. E



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2003 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.



Electrical Characteristics

Frequency Characteristics						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Nominal Frequency	+25°C	10		50	MHz	
Frequency Stability (other stability available, please contact factory)	0°C to +50°C		± 0.5		ppm	B57
	-20°C to +70°C		± 1		ppm	N16
	-40°C to +85°C		± 3		ppm	T36
Aging	1 st year, for 10 MHz		± 0.5	± 1	ppm	
Acceleration Sensitivity	(Note 1)			2.5	ppb/g	
Frequency vs Reflow	After 24hrs recovery			1	ppm	
Electronic Frequency Control	EFC = 0 to SUP. positive slope		± 5		ppm	
Phase Noise Performances						
Parameter	Frequency Offset (Hz)	Min	Typical	Max	Units	Ordering Code
Static @ 10 MHz nominal Frequency	10		-105		dBc/Hz	
	100		-135		dBc/Hz	
	1k		-155		dBc/Hz	
	10 k		-160		dBc/Hz	
	100 k		-163		dBc/Hz	
DC Supply						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
Supply Voltage		4.75	5.0	5.25	VDC	
Input Current	+ output sink/source current			15	mA	
RF Output: CMOS						
Parameter	Conditions	Min	Typical	Max	Units	Ordering Code
CMOS						
Load		10	15		pF	
Level		+4.5 "1" level		+0.5 "0" level	V	
Rise/Fall Time				3	ns	
Symmetry		40	50	60	%	

(1) Acceleration Sensitivity is worst axis tested at 90 Hz, 10 g



Environmental Screenings

Environmental			
Screening	Conditions	Method, Condition	Notes
Vibration	MIL-STD-202G	214, I.A	0.2 PSD, 5.35 g RMS
Shock	MIL-STD-202G	213, C	100 g, 6ms, half-sine

Recommendation and General Information

Conditions	
Parameter	Notes
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +85°C
Terminal Finish	SnPb 63/37 (non-RoHS), SnAg 96.5/3.5 (Lead Free), Gold Plated (RoHS), STD
Package Weight	3 grams
Soldering Instruction	By hand or reflowed (recommended peak temperature of +220°C for 10 sec max)
Shipping	Tray pack
Marking	Line 1: Greenray logo Line 2: Model Line 3: Frequency Line 4: Serial Number + Data code (YYWW)

Ordering Example

ZT1610	-	N16	-	10.0 MHz	-	E
Model		Stability		Frequency in MHz		Termination finish
		Refer to Electrical Specs Table* B57 (0 to +50°C) N16 (-20 to +70°C) T36 (-40 to +85°C)		From 10 to 50 MHz		E: Gold plated (RoHS), STD PB: SnPb 63/37 (non-RoHS) LF: SnAg 96.5/3.5 (Lead-free)

*Other frequency stabilities available, please contact factory.




frequency control solutions

ZT610 SERIES
10 MHz to 50 MHz



Package information

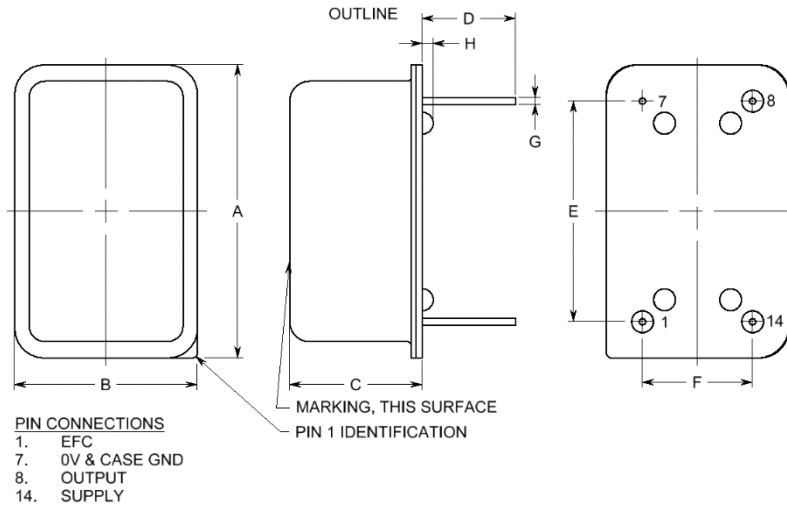

PART DIMENSIONS

DIM	TYP.		MAX.	
	inches	mm	inches	mm
A	0.800	20.32	0.815	20.70
B	0.500	12.70	0.515	13.08
C	NA	NA	0.370	9.34
D	0.215	5.46	0.230	5.84
E	0.600	15.24	0.610	15.49
F	0.300	7.62	0.310	7.87
G	ø0.018	ø0.46	ø0.021	ø0.53
H	0.018	0.46	0.024	0.61



Greenray Industries, Inc., 840 West Church Road, Mechanicsburg, PA 17055
 TEL: 717-766-0223 FAX: 717-790-9509 e-mail: sales@greenrayindustries.com
 www.greenrayindustries.com

Greenray Proprietary Greenray Industries, Inc. disclaims all liability arising from this information and its use. No licenses are conveyed, implicitly or otherwise, to any Greenray intellectual property rights. ©2003 Greenray Industries, Inc. All rights reserved. Reproduction in whole or in part is prohibited.